




MCC-UT85-15 Koax Kabel

15 Ohm
VPE 21m

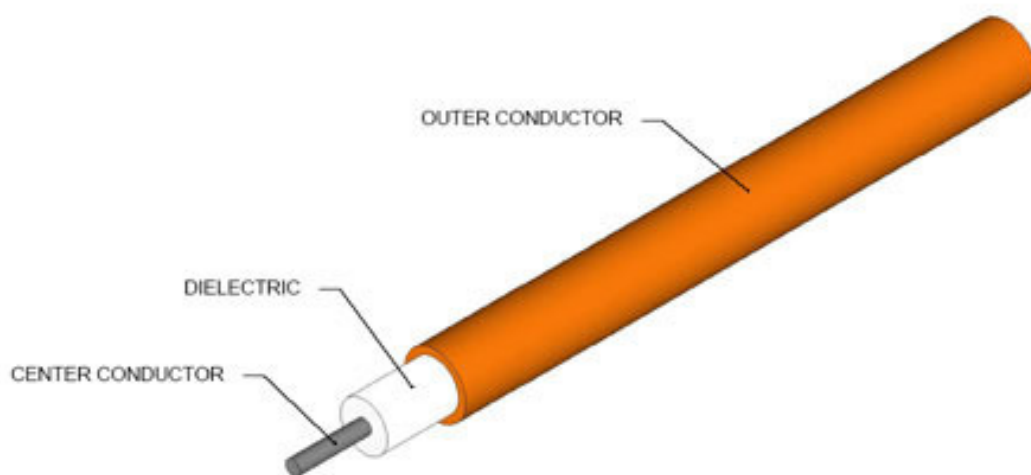

SONDERPREIS (solange Vorrat reicht):
€ 20,- / m

Alders GmbH

Ostring 1 · D-47918 Tönisvorst

Telefon: +49 (0)2151/78139-0

Telefax: +49 (0)2151/78139-50

eMail: info@alders.de

Internet: www.alders.de

206 Jones Blvd. Pottstown, PA 19464 USA
Phone: 610-495-0110 : 800-223-2629
www.micro-coax.com

Semi-Rigid Coaxial Cable

MECHANICAL CHARACTERISTICS

Outer Conductor Diameter , inch (mm)	0.0865+/-0.001 (2.197+/-0.0254)
Dielectric Diameter , inch (mm)	0.066 (1.676)
Center Conductor Diameter , inch (mm)	0.046+/-0.001 (1.168+/-0.0254)
Maximum Length , feet (meters)	20 (6.1)
Minimum Inside Bend Radius , inch (mm)	0.125 (3.175)
Weight , pounds/100 ft. (kg/100 meters)	1.76 (2.62)

ELECTRICAL CHARACTERISTICS

Impedance , ohms	15+/-1.0		
Frequency Range GHz	DC-47		
Velocity of Propagation %	70		
Capacitance , pF/ft. (pF/meter)	96.7 (317.4)		
Typical Insertion Loss , dB/ft. (dB/meter) and Average Power Handling, Watts CW at 20 degrees Celsius and Sea level	Frequency	Insertion Loss	Power
	0.5 GHz	0.25 (0.83)	103.5
	1.0 GHz	0.36 (1.17)	72.8
	5.0 GHz	0.82 (2.70)	31.8
	10.0 GHz	1.19 (3.90)	22.1
	20.0 GHz	1.73 (5.68)	15.3
Corona Extinction Voltage , VRMS @ 60 Hz	850		
Voltage Withstand , VRMS @ 60 Hz	2000		

ENVIRONMENTAL CHARACTERISTICS

Outer Conductor Integrity Temperature , Deg Celsius	150
Maximum Operating Temperature , Deg Celsius	125

MATERIALS

Outer Conductor	Copper
Dielectric	PTFE
Center Conductor	SPC

CUTAWAY

